

custom  
solutions

THE  
FINIAL  
COMPANY

## arched window solutions

- Available for ½" 5OSRB, ¾" 75RD and 75HSRB, 1" SRT1, 1¼" RD125, SRT2, TWCH125, and 1½" TRT steel poles only.
- Some poles will need to be cut at apex (center) for shipping; some arches cannot be achieved.
- Arched poles with splices are subject to additional bending fees.

**IMPORTANT:** A template is required to ensure accuracy of production. For information on how to create your template, please refer to the Retail Price List.

### standard arch

arch height is equal or greater than half the arch width

### eyebrow arch

arch height is less than half the arch width



shown: SR3 rings welded onto 1¼" TWCH125 pole  
ARBE and L135 brackets  
finish 350G Statuary Bronze with Gold

#### ARBC arched rod center bracket

Please specify return (distance from wall to center of cradle)

**note:** cannot be used for installations with rings (brackets without eyelet cradles may be substituted)




#### ARBE arched rod end brackets

Sold in pairs only  
Please specify return (distance from wall to center of cradle) and pole being used.  
Cups are custom made to style of pole.


**note:** outer ring can only reach 1½" from end of pole due to the bracket cup



## do you need a vertical or horizontal arch?

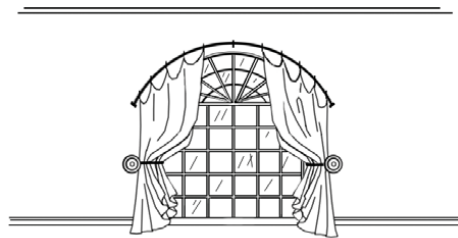

Vertical Arch Installation  
great for arched windows

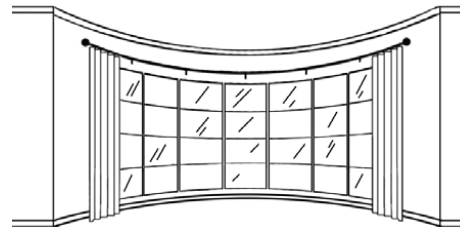

Horizontal Arch Installation  
great for curved bay windows

**please note:** If using rings for vertical arch installation, rings must be welded into place. Ring position must be noted on your template. Outermost rings must be 1½" minimum from end of pole due to ARBE bracket cup. Rings sold separately.

Any steel bracket or finial may be used for this type of arch.