


custom bypass brackets

Our bypass brackets and c-rings allow continuous ring movement along the length of your pole. These work particularly well for long one-way draw treatments, unusually wide windows, and walls featuring multiple windows.

CAUTION: Bypass Brackets do not have full cradles. Standard brackets must be installed at each end to secure pole.

SCB35

steel bypass bracket, single standard 31/2" return, 3/4"W backplate x 21/2" or 3"L



SCB35

SCB6

steel bypass bracket, single 6" return, 3/4"W backplate x 21/2" or 3"L

SCBC

steel custom bypass bracket, single custom return, 3/4"W backplate x 21/2" or 3"L

please specify:

A. 75RD (3/4") RR100 (1"), RR125 (1 1/4"), RD125 (1 1/4"), RR175 (1 3/4") pole, or RD175 (1 3/4") pole

B. return (distance from wall to center of cradle)

SCBCDBL


steel custom bypass bracket, double custom front and back return, 3/4"W backplate x 5 1/4"L

please specify:


A. 75RD (3/4") RR100 (1"), RR125 (1 1/4"), RD125 (1 1/4"), RR175 (1 3/4") pole, or RD175 (1 3/4") pole

B. front and back returns (distance from wall to center of cradle)

note: return may be restricted by the size of poles and rings specified



SCBCDBL




When ordering bypass brackets please specify:

A. 75RD (3/4"), RR100 (1") pole, RR125 and RD125 (1 1/4") pole or RR175 and RD175 (1 3/4") pole


B. Return distance from wall to center of cradle

Note: Return may be restricted by the size of the poles and rings specified

*CAUTION: Bypass Brackets do not have full cradles. Standard Brackets must be installed at each end to secure pole.




return will match single cradle brackets used at each end of pole

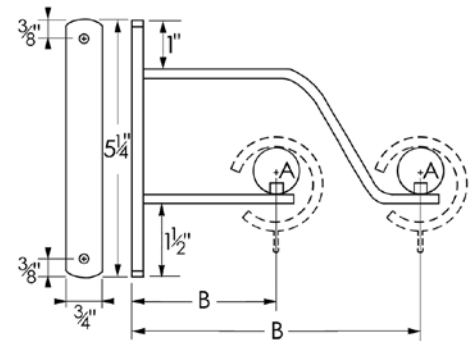

returns will match double cradle brackets used at each end of pole

c-rings

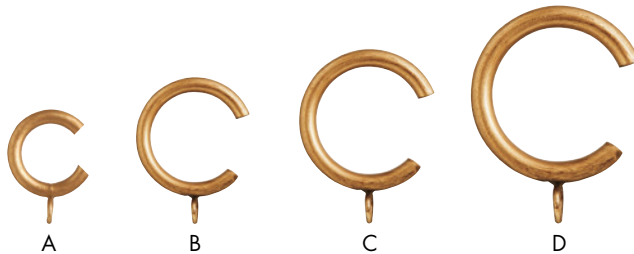

A. CR-SR75

smooth steel c-ring
1 1/4"ID, 1 3/4"OD
3/4" use with 75RD

B. CR-SR3

smooth steel c-ring
1 1/2"ID, 2"OD
1", 1 1/4" use with RR100 or RD125 pole

C. CR-SR7

smooth steel c-ring
2 1/4"ID, 2 3/4"OD
1 1/4" use with RR125

D. CR-SR12

smooth steel c-ring
2 5/8"ID, 3"OD
1 3/4" use with RR175 or RD175 pole

Return or drop distance in excess of 8" on any custom bracket will incur additional fees and requires addition of support arm.